


HEX SLOTTED NUTS

Lock Fastener Co., LTD.

1-1 Kusunecho Yao-city Tel 0729-97-9990
Osaka ,Japan 581-0814 Fax 0729-97-0115

American Society For Testing and Materials
INDUSTRIAL FASTENERS INSTITUTE
FASTENER STANDARDS
ANSI/ASME B18.2.2 1986
HEX SLOTTED NUTS

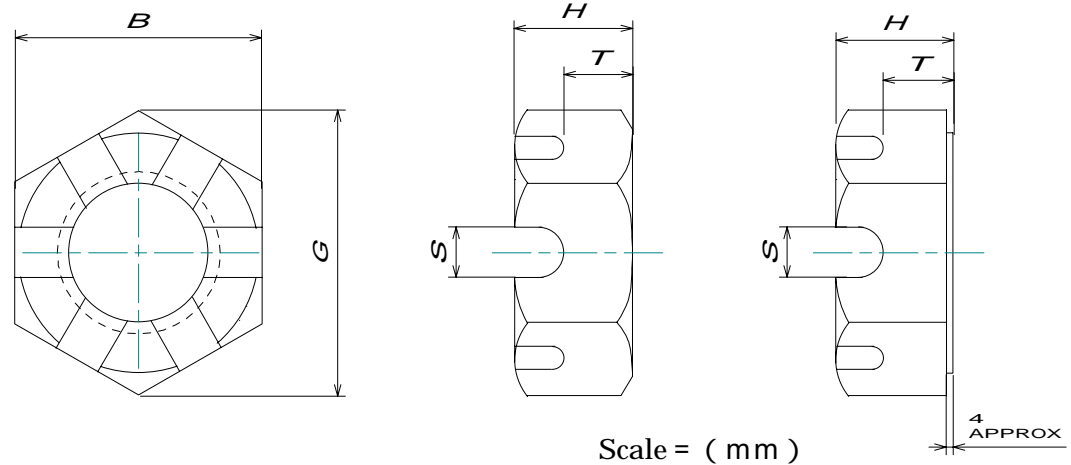

Scale = (mm)

Size	F		G		H		T		S		FIR
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
1/4	11.13	10.87	12.83	12.40	5.74	5.38	3.56	3.05	2.54	1.78	0.38
5/16	12.70	12.42	14.66	14.15	6.93	6.55	4.57	4.06	3.05	2.29	0.41
3/8	14.27	14.00	16.51	15.95	8.56	8.13	5.33	4.83	3.81	3.05	0.43
7/16	17.48	17.15	20.17	19.51	9.78	9.27	5.84	5.33	3.81	3.05	0.46
1/2	19.05	18.69	22.00	21.34	11.38	10.85	7.37	6.86	4.57	3.81	0.48
9/16	22.23	21.87	25.65	24.94	12.60	12.01	7.87	7.37	4.57	3.81	0.51
5/8	23.83	23.42	27.51	26.70	14.20	13.59	8.64	8.13	6.10	4.57	0.53
3/4	28.58	27.64	32.99	31.50	16.89	15.67	10.16	9.65	6.10	4.57	0.58
7/8	33.32	32.23	38.51	36.75	19.71	18.39	13.21	12.45	6.10	4.57	0.64
1"	38.10	36.83	43.99	41.99	22.53	21.11	14.99	14.22	7.62	6.10	0.69
1"-1/8	42.88	41.43	49.50	47.22	25.37	23.85	16.26	15.49	8.38	6.10	0.76
1"-1/4	47.63	46.02	54.99	52.48	27.79	26.16	17.78	17.02	10.16	7.87	0.84
1"-3/8	52.37	50.65	60.50	57.73	30.63	28.91	20.83	19.81	10.16	7.87	0.91
1"-1/2	57.15	55.25	65.99	62.99	33.45	31.62	21.84	20.83	11.68	9.40	0.99