

NUT-HEX, HEAVY (TYPE NU)


Lock Fastener Co., LTD.

1-1 Kusuneko Yao-city Tel 0729-97-9990

Osaka Japan 581-0814 Fax 0729-97-0115

E-Mail lockfastener@kawachi.zaq.ne.jp

THREAD : MIL-S-7742 OR MIL-S-8879

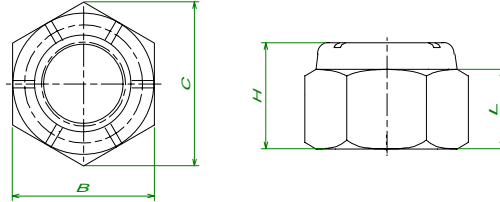

NYLON INSERT LOCKING NUTS (NU TYPE)

Scale = (mm)

Size	NC	B		H		C		L	
		MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
1 / 4	20	12.75	12.50	9.90	9.15	14.40	13.64	7.74	6.99
5 / 16	18	14.32	14.05	11.50	10.75	16.17	15.42	8.89	8.13
3 / 8	16	17.52	17.25	14.27	13.52	19.83	19.08	10.33	9.58
7 / 16	14	19.10	18.83	15.46	14.70	21.64	20.88	12.16	11.40
1 / 2	13	22.27	21.98	18.23	17.49	25.22	24.46	14.19	13.44
9 / 16	12	23.87	23.57	20.62	19.87	27.07	26.32	17.01	16.26
5 / 8	11	27.02	26.72	22.19	21.44	30.63	29.87	17.57	16.82
3 / 4	10	31.80	31.47	25.78	25.02	36.06	35.31	20.44	19.69
7 / 8	9	36.57	36.25	28.95	28.20	41.50	40.75	22.80	22.05
1 "	8	41.32	41.00	33.32	31.75	46.94	46.18	25.78	25.02
1 - 1 / 8	7	46.22	45.42	37.31	36.15	51.23	50.47	28.21	27.46
1 - 1 / 4	7	51.00	50.12	42.46	40.90	56.61	55.73	32.13	31.37
1 - 3 / 8	6	55.80	54.84	46.43	44.86	61.74	60.99	35.33	34.57
1 - 1 / 2	6	60.55	59.54	49.60	48.03	66.97	66.21	36.27	35.51
1 - 3 / 4	5	70.15	68.96	60.35	57.15	77.47	76.71	46.86	46.11
2 "	4. 1 / 2	79.67	78.39	62.71	59.52	88.11	87.23	44.83	44.07
1 - 5 / 8 - 4		64.26	65.32	52.80	55.98	SP Blank H59			

